

Kawasaki Ninja 400 ABS 2018- (SH-V4-C + SH-U01)

Secure the bike on a stand.



Remove the seats and the black covers from the fuel tank.


Remove the side fairings.

Remove the upper fairing and the headlight.

Remove the fuel tank.



Locate the gray dashboard connector and unplug it.

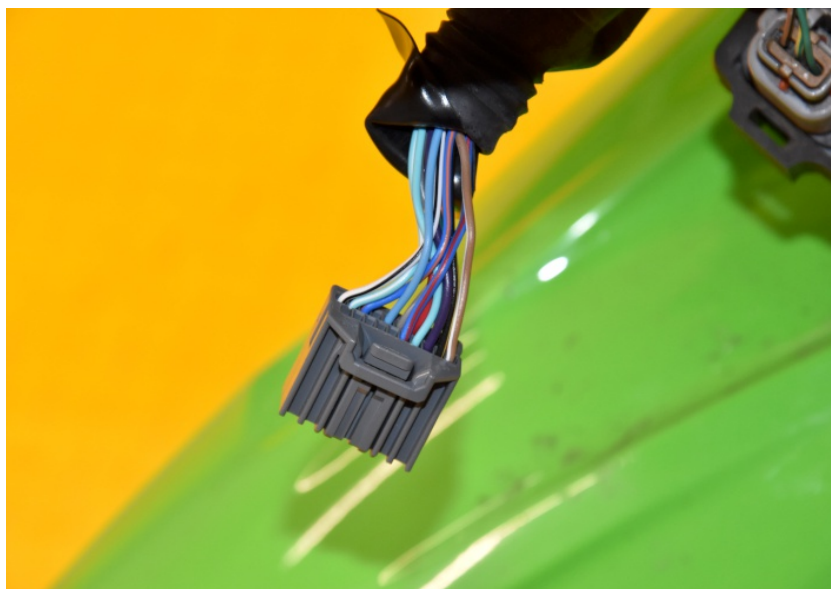

Kawasaki Ninja 400 ABS 2018- (SH-V4-C + SH-U01)


Cut the Light Blue/White wire.

Connect the SpeedoHealer White wire to the Light Blue/White wire end, which is at the wiring harness side.

Connect the SpeedoHealer Green wire to the Light Blue/White wire end, which goes to the dashboard connector.



Splice the SpeedoHealer Red wire to the Brown/White wire.

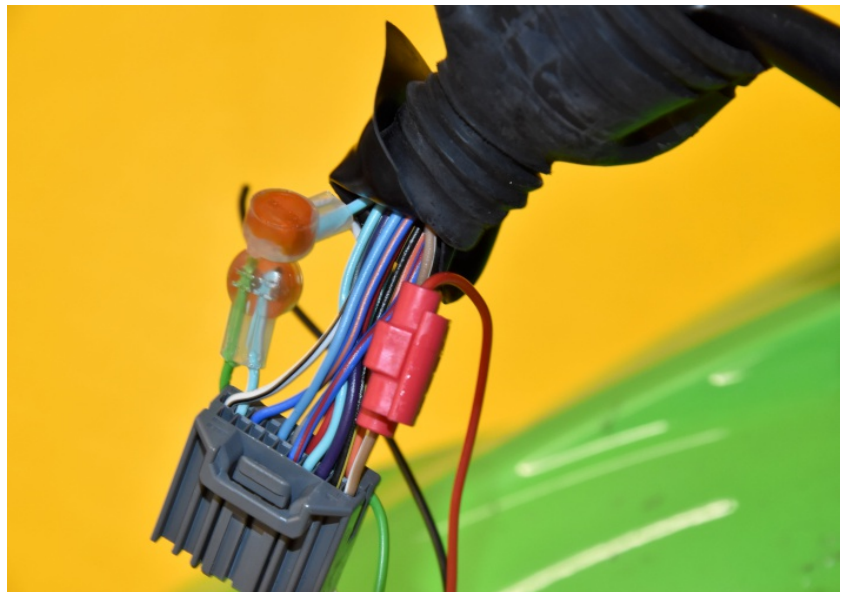

Splice the SpeedoHealer Black wire to the Black/Yellow wire.



Kawasaki Ninja 400 ABS 2018- (SH-V4-C + SH-U01)

Typical position for the remote button.



Typical position for the SpeedoHealer.

Secure the unit properly.

