

SpeedoHealer

Supplementary Manual



Yamaha WR250X 2008-2013 (SH-V4 + SH-Y01)


Remove the seat.

Remove the frame covers under the seat.



Plug the SpeedoHealer connectors in-line with the vehicle speed sensor connectors.

(White, 3-pole connectors at the left side below the frame cover)

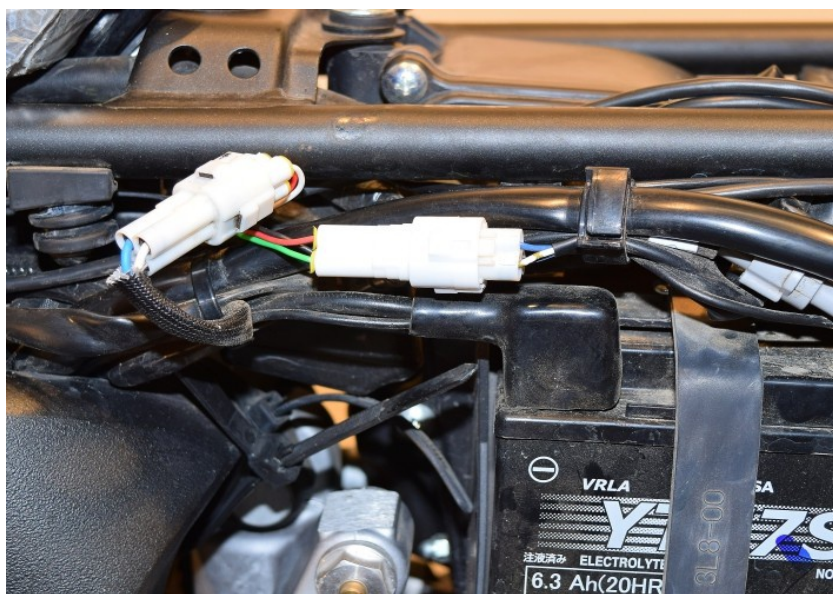

Typical position for the SpeedoHealer.

Secure the unit properly.

