


Yamaha YZF-R125 2008-2013 (SH-V4 + SH-Y03)

Secure the bike on a stand.




Locate the vehicle speed sensor connectors under the dashboard.

(Transparent, 3-pole connectors)

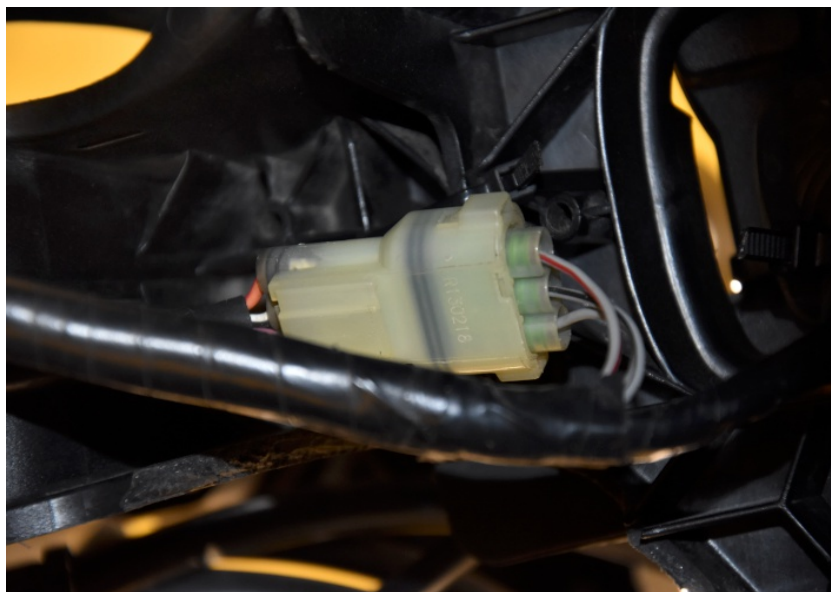

Plug the SpeedoHealer connectors in-line with the vehicle speed sensor connectors.

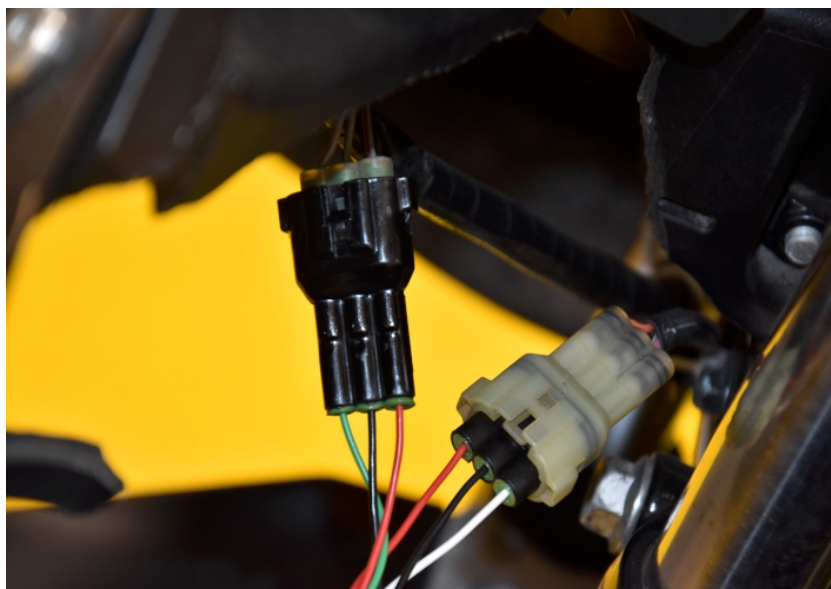

Yamaha YZF-R125 2008-2013 (SH-V4 + SH-Y03)

Typical position for the remote button.



Typical position for the SpeedoHealer.

Secure the unit properly.

