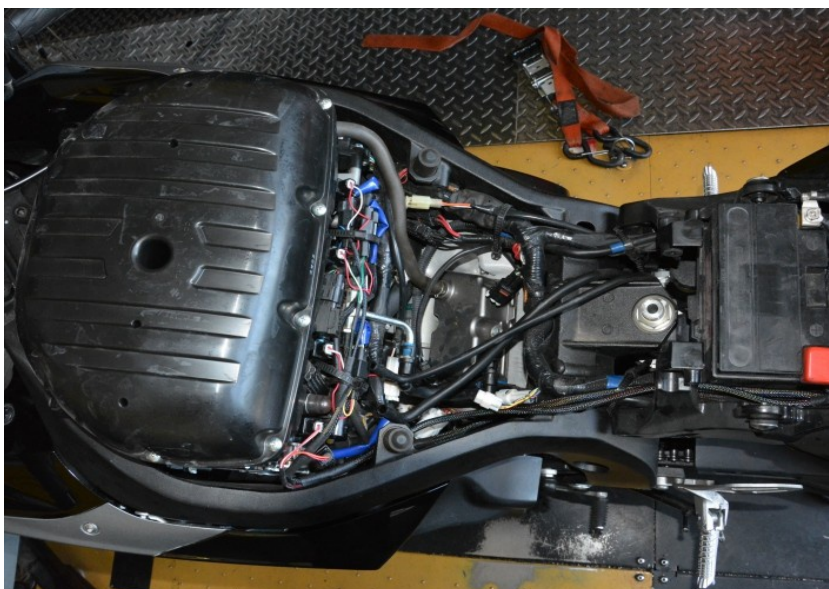# X-TRE Power Box
Supplementary Manual

Remove the black covers from the fuel tank.

Remove the main seat.

Lift up or remove the fuel tank.

X-TRE Power Box
Supplementary Manual

Plug the X-TRE connectors in-line with the gear position sensor connectors.

Mount the X-TRE box to the inner side of the frame by the supplied Velcro strips, and secure the box and cables with cable ties.

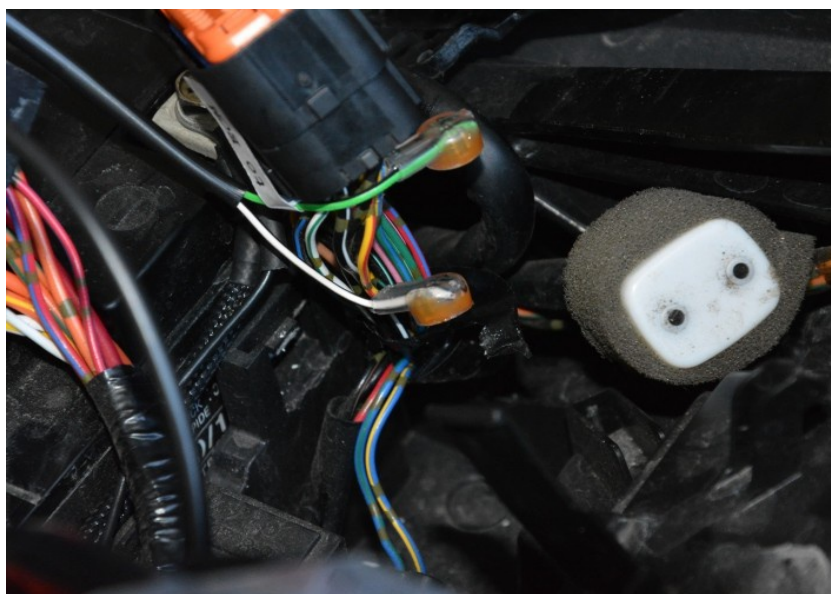*(White, 3-pole triangular connectors below the fuel tank at the left side)*

Cut the Black/Green wire about 4cm (1.6") away from the ECM connector.

Connect the X-TRE Black/Green wire to the Black/Green wire end, which goes to the ECM connector.

Connect the X-TRE Black/White wire to the Black/Green wire end, which is at the wiring harness side.

(Black connector, PIN #23)

Connect the X-TRE Red wire to the Orange/Green wire of the rear brake light switch connector.

(Transparent, 2-pole connector below the fuel tank)

(X-TRE mode: 5)