

# QuickShifter easy

## Supplementary Manual



Aprilia Dorsoduro 750 non-ABS Factory 2008-2015 (Custom\_iQSE-1 + QSH-F1G)

Secure the bike on a stand.



Remove the seat.

Remove the side fairings from the fuel tank.


Remove the fuel tank.



Cut the connectors from the harness.

Cut the Red/Brown wire of the fuel injectors at 6-pole the black multi connector.

Connect the QSH Red wire to the Red/Brown wire end, which goes to the injectors.

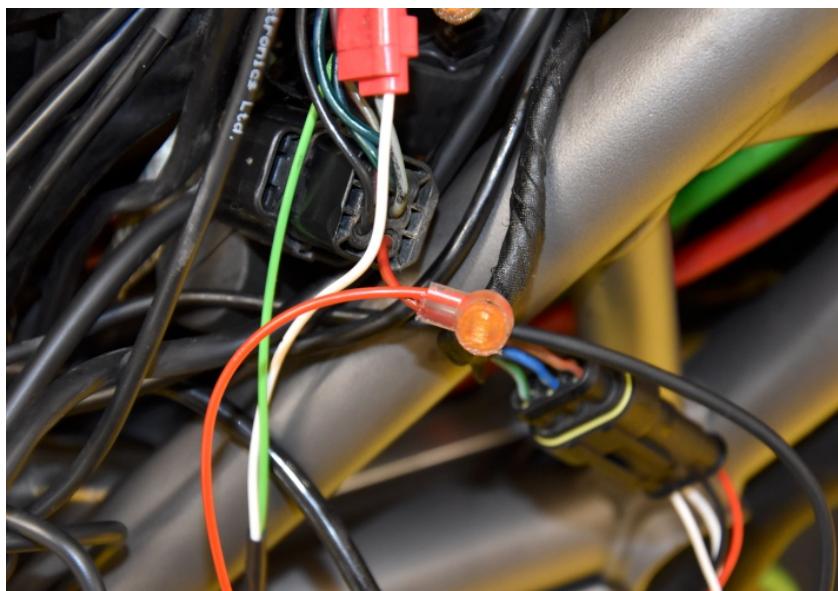


# QuickShifter easy


## Supplementary Manual

### Aprilia Dorsoduro 750 non-ABS Factory 2008-2015 (Custom\_iQSE-1 + QSH-F1G)

Connect the QSH Green wire to the Red/Brown wire end, which goes to the bike's main wiring harness.

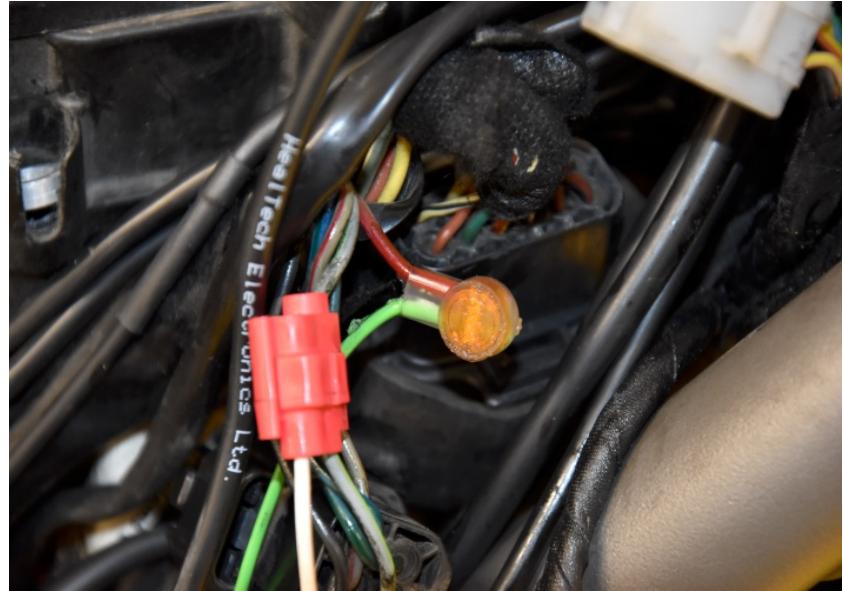

Connect the QSH White wire to the Grey/Green wire.

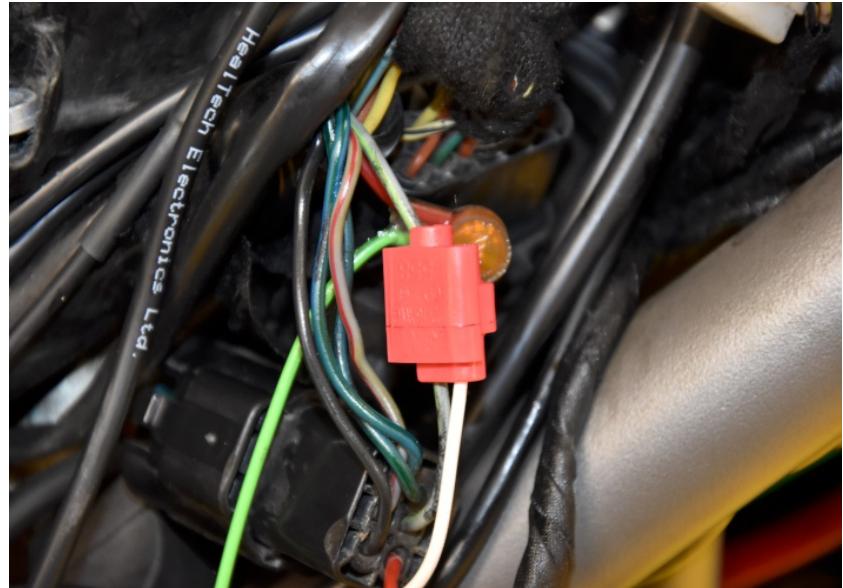

Connect the QSH Black wire terminal to the battery negative terminal.



# QuickShifter easy


## Supplementary Manual



Aprilia Dorsoduro 750 non-ABS Factory 2008-2015 (Custom\_iQSE-1 + QSH-F1G)

Mount the QSE sensor.

*(Replace the bolt with the one supplied.  
Tighten the bolt in this position by about 6 Nm. If you do not have torque wrench,  
tighten the bolt until the shift arm is tight  
on the gearbox shaft.)*

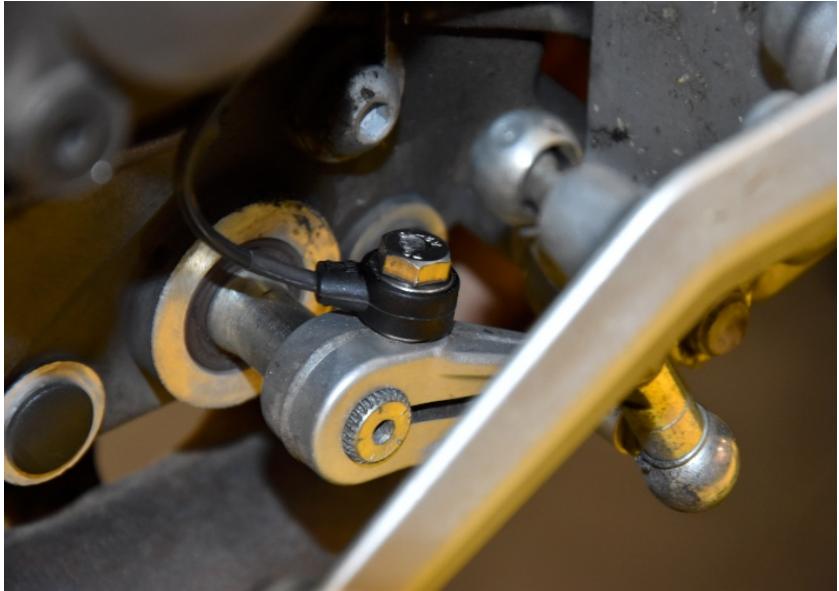

Typical position for the QuickShifter easy.

Secure the unit properly.

