

QuickShifter easy Supplementary Manual



Honda CB1100 ABS RS 2017-2022 (iQSE-1 + QSH-P2T)

Secure the bike on a stand.



Remove the seat.

Remove the black covers below the seat.

Remove the fuel tank.



Locate the ignition coil connectors under the fuel tank.



QuickShifter easy Supplementary Manual




Honda CB1100 ABS RS 2017-2022 (iQSE-1 + QSH-P2T)

Take off the Black/White terminal from the coil.

Connect the Black/White terminal to the QSH Red wire terminal.

Connect the QSH Green terminal to this coil terminal.

Splice the QSH White wire to the Blue/Black wire of the coil by using the supplied red wire tap connector.

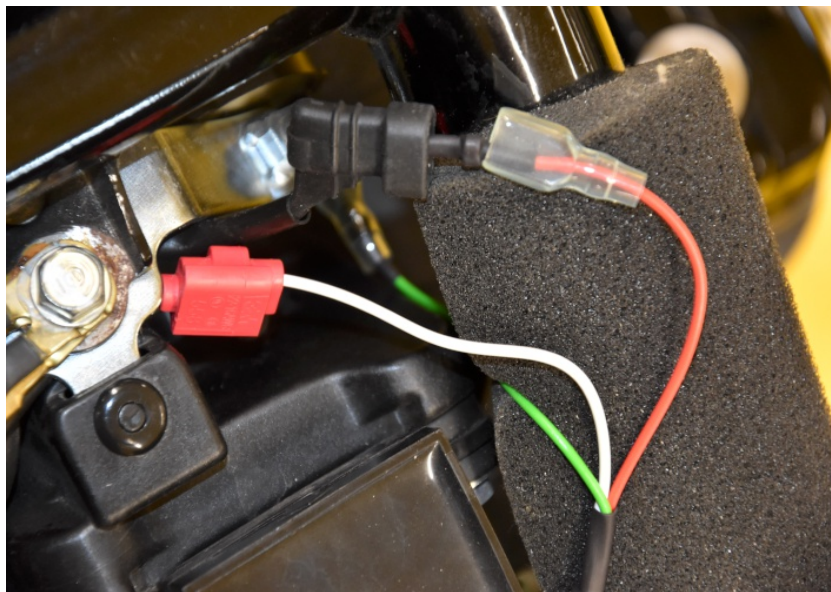

Take off the Black/White terminal from the other ignition coil.

Connect the QSH Green terminal to the empty ignition coil terminal.

Isolate the unused Black/White terminal with tape.



Connect the QSH Black wire terminal to the battery negative terminal.



QuickShifter easy Supplementary Manual



Honda CB1100 ABS RS 2017-2022 (iQSE-1 + QSH-P2T)

Mount the QSE sensor.

(Place the sensor in the rod as shown.

Tighten the nut by hand fully and then by a 1/4 turn using a wrench but maximum to about 6 Nm.)



Typical position for the QuickShifter easy.

Secure the unit properly.

