

QuickShifter easy Supplementary Manual



Triumph Tiger Explorer ABS TC 2012-2020 (iQSE-W1 + QSH-P4B)

Secure the bike on a stand.




Remove the seats and the side fairings.

Remove the fuel tank and the airbox.



Plug the QSH connectors in-line with the ignition coil connectors.

Make sure the QSH plugs marked with RED square are connected, and leave one coupler unused)

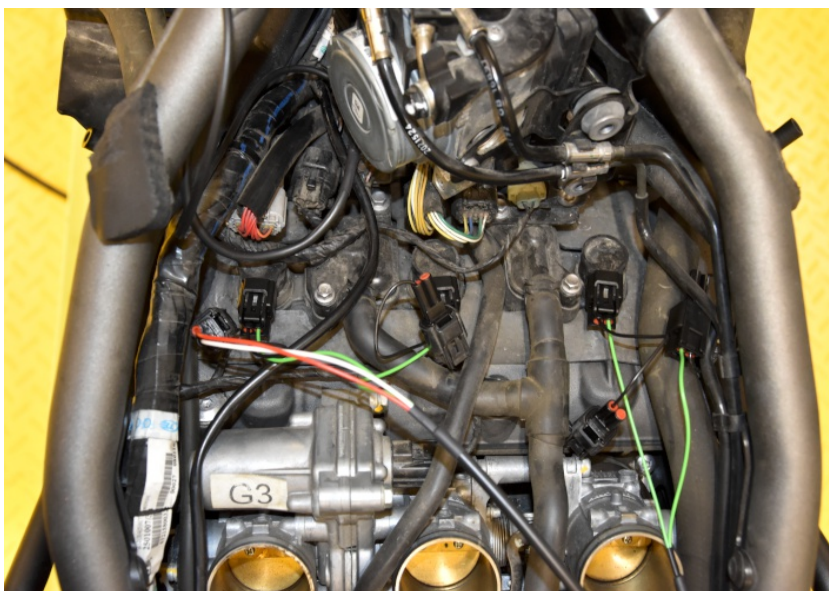

QuickShifter easy Supplementary Manual



Triumph Tiger Explorer ABS TC 2012-2020 (iQSE-W1 + QSH-P4B)

Connect the QSH Black wire terminal to the battery negative terminal.



Mount the QSE sensor.

*(Replace the bolt with the one supplied.
Place the conical washers at the two sides
of the sensor like this: (O). Tighten the bolt
in this position by about 6 Nm. If you do not
have torque wrench, tighten the bolt until
the shift arm is tight on the gearbox shaft.)*



Typical position for the QuickShifter easy.

Secure the unit properly.

